(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 30 June 2005 (30.06.2005)

(10) International Publication Number WO 2005/058692 A1

(51) International Patent Classification7: B63H 21/02, F17C 9/02

B63J 5/00,

(21) International Application Number:

PCT/FI2004/050019

(22) International Filing Date: 25 February 2004 (25.02.2004)

(25) Filing Language:

(26) Publication Language:

English

(30) Priority Data:

18 December 2003 (18.12.2003) 20031848 \mathbf{FI} PCT/FI2004/050009


30 January 2004 (30.01.2004)

- (71) Applicant (for all designated States except US): WÄRT-SILÄ FINLAND OY [FI/FI]; Tarhaajantie 2, FI-65380 Vaasa (FI).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): KARLSSON, Sören

- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

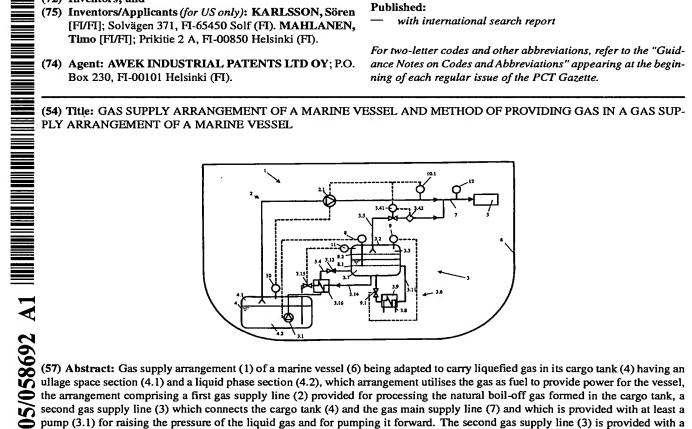

second gas supply line (3) which connects the cargo tank (4) and the gas main supply line (7) and which is provided with at least a pump (3.1) for raising the pressure of the liquid gas and for pumping it forward. The second gas supply line (3) is provided with a gas reservoir (3.2) having an ullage space section (3.3) and liquid phase section (3.7), and that the arrangement is provided with a first duct section (3.4) of the second gas supply line (3) connecting the liquid phase section of the cargo tank (4) and the liquid phase section of the gas reservoir (3.2), and being provided with the pump (3.1), and that the arrangement is additionally provided with a return line (3.14) connecting the liquid phase section of the reservoir (3.2) and the cargo tank (4) being provided with a control valve (3.15) for controllably returning liquid gas back into the cargo tank (4).

